



# TMD-180/270/330

STREAMLINE OPERATIONS.



UNIT RUNNING  
BEACON




15 MPH (24.1 KM/H)  
TOW SPEED



LCD COLOR  
DISPLAY



AUTO COMPRESSOR  
COOL DOWN SYSTEM

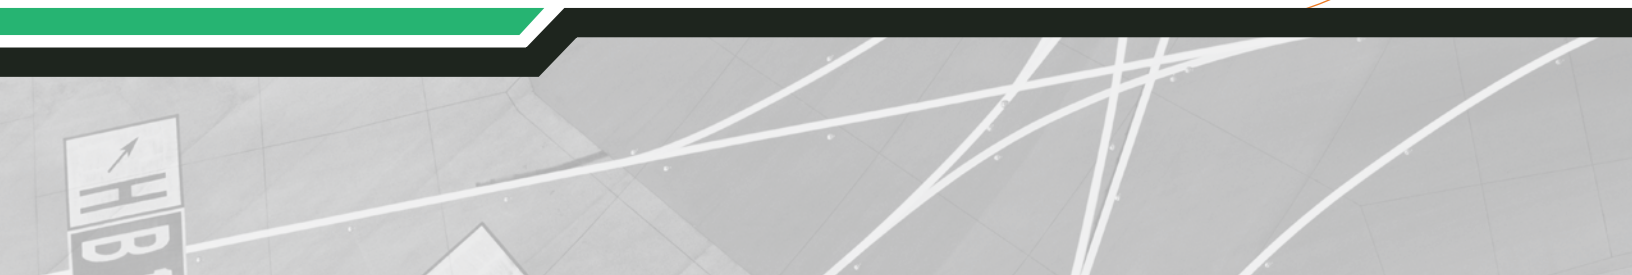

# TUG® - TMD-180/270/330



	TMD180 - CUMMINS QSX15 435 HP	TMD270 - CUMMINS QSX15 600 HP	TMD330 - CUMMINS QSX15 600 HP
CHASSIS POWER			
Fuel & Compatible Fuel	ULSD Only 110 US Gal (416.4 L)		
Displacement	912 CID (15 L)		
Governed RPM w/ Full Load	2,100		
Net Brake HP at Governed RPM	435 (324.4 kW)	600 (447.4 kW)	
DIMENSIONS			
Width	82 in (2,082.8 mm)		
Wheelbase	148 in (3,759 mm)		
Height	92.5 in (2,349.5 mm)		
Standard Weight	12,600 lbs (5715.3 kg)	13,300 lbs (6,032.8 kg)	
Length (Without Hitches)	176 in (4,470.4 mm)		
Ground Clearance	8.5 in (216 mm)		
PERFORMANCE			
Mass Flow Output	180 lbs (81.6 kg)/min at 68F (20C)	270 lbs (122.5 kg)/min at 68F (20C)	330 lbs (150 kg)/min at 68F (20C)
EPA Tier / Certification Level	Tier 4F		
Type	Water-Cooled, Direct Injected, 6 Cylinder, Turbocharged CAC		
Speed (Idle)	1000 RPM		
Speed (Max. when Loaded)	2100 RPM		
Max Tow Speed	15 mph (24 km/h)		
Output Connection	Single Hose	Double Hoses	